



Light-Weight Hard Metal Agitator Dewatering Pumps



LWA® Series


Light-Weight Hard Metal Agitator Dewatering Pumps

BJM Pumps® LWA® Series pumps are tough and durable. They are designed and constructed for dewatering sand, silt, coal fines and abrasive light slurries. These economical hard metal pumps are built to outlast rubber-lined and cast iron pumps and to keep your production running to save you repair and downtime costs.

To learn more about getting “the pump you need, guaranteed,” visit www.flowsolutions.com or call 860-399-5937.

Key Benefits of the LWA® Series

- Chrome iron impeller and wear plate
- Hardened ductile iron volute and agitator
- Built-in agitator keeps solids from settling at the bottom to prevent clogging

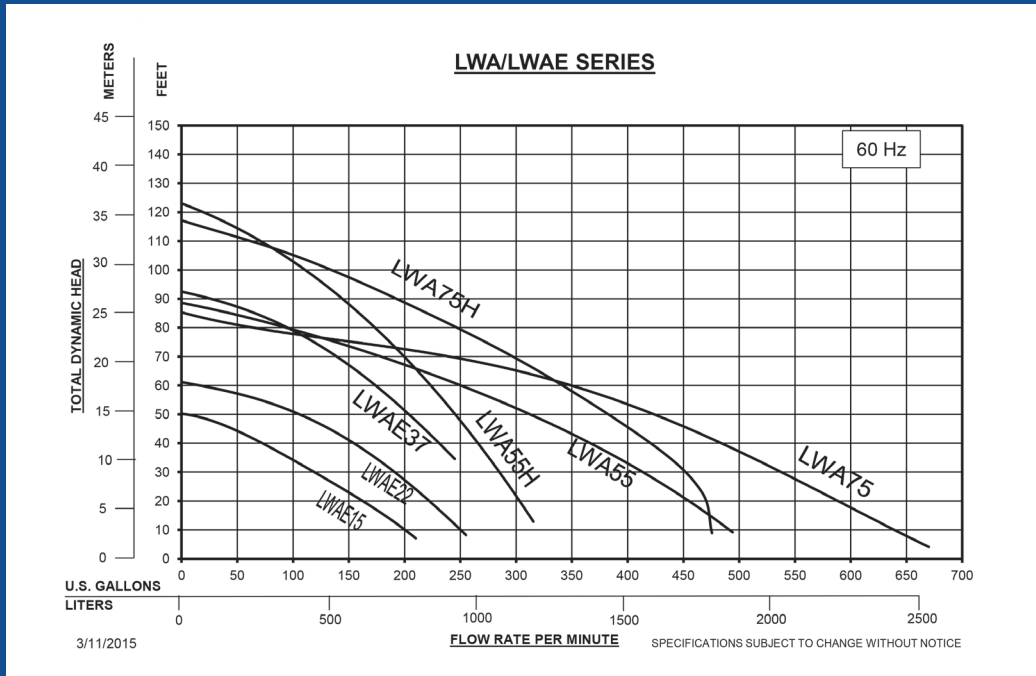

Hard Metal Construction For Abrasive Applications

- Rock/Sand Plants
- Coal Prep Plants
- Lime Slake Pits
- Construction Sites
- Grit Chambers
- Drilling Mud Transfer
- Mines
- Ash Sumps



MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	HEIGHT	WIDTH	PUMP WEIGHT LBS	EST SHIP WEIGHT LBS
LWAE15	3"	2	230/460/575	3	3450	6.1/3.1/2.5	0.4"	50'	210	21.5"	10.2"	93	130
LWAE22	3"	3	230/460/575	3	3450	8.6/4.3/3.5	0.4"	61'	255	21.5"	10.2"	97	135
LWAE37	3"	5	230/460/575	3	3450	13.8/6.9/5.5	0.4"	92'	245	22.7"	10.2"	106	150
LWA55	4"	7.5	230/460/575	3	3450	18.7/9.3/7.4	0.4"	88'	494	29"	12.5"	172	230
LWA55H	3"	7.5	230/460/575	3	3450	18.5/9.2/7.4	0.4"	123'	315	29"	12.5"	167	230
LWA75	6"	10	460/575	3	3450	12.8/10.2	0.4"	85'	670	31.3"	12.5"	181	225
LWA75H	4"	10	460/575	3	3450	12.8/10.2	0.4"	117'	475	29"	12.5"	176	220

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



INDUSTRIAL FLOW SOLUTIONS™

Distributor:

104 John W Murphy Drive
New Haven, CT 06513

Tel: (860) 399-5937

Fax: (860) 399-7784

Web: www.flowsolutions.com